

搪銑削頭 MILLING HEAD




規格表 Specifications

主軸馬達 Spindle Motor	東元永磁同步馬達 22kw (30HP) TECO permanent magnet synchronous motor 22kw(30HP) 1500RPM / 2000RPM			
進給馬達 Feed Motor	伺服馬達5.5kw (客戶自備) Servo motor 5.5kw Customer should prepare servo motor			
進給行程 Feed Travel	Max. 500mm (往下Down: 350mm, 往上Up:150mm)			
變速方式 Speed Change Method	手動 / 12段 (Manual / 12 Section)			
減速比 Reduction Ratio	40.404	21.721	18.46	13.915
	9.924	9.054	7.48	4.867
	4.137	3.118	2.239	1.718
主軸孔端斜度 Taper of Spindle Nose	ISO/NT/BT -50 (7 : 24)			
銑刀最大直徑 Max Diameter of Cutter	Ø300			

轉速示意表 Speed Table

馬達Motor 1500 R.P.M				
輸出轉速 Output speed	35	66	77	103
	144	158	192	294
	346	460	644	855
馬達Motor 2000 R.P.M				
輸出轉速 Output speed	47	88	104	137
	193	211	255	393
	462	613	859	1140

■ 由於不斷的研究、發展、改進，機械設計及規格如有更改，恕不另行通知。
■ All specifications and designs are subject to change without notice.

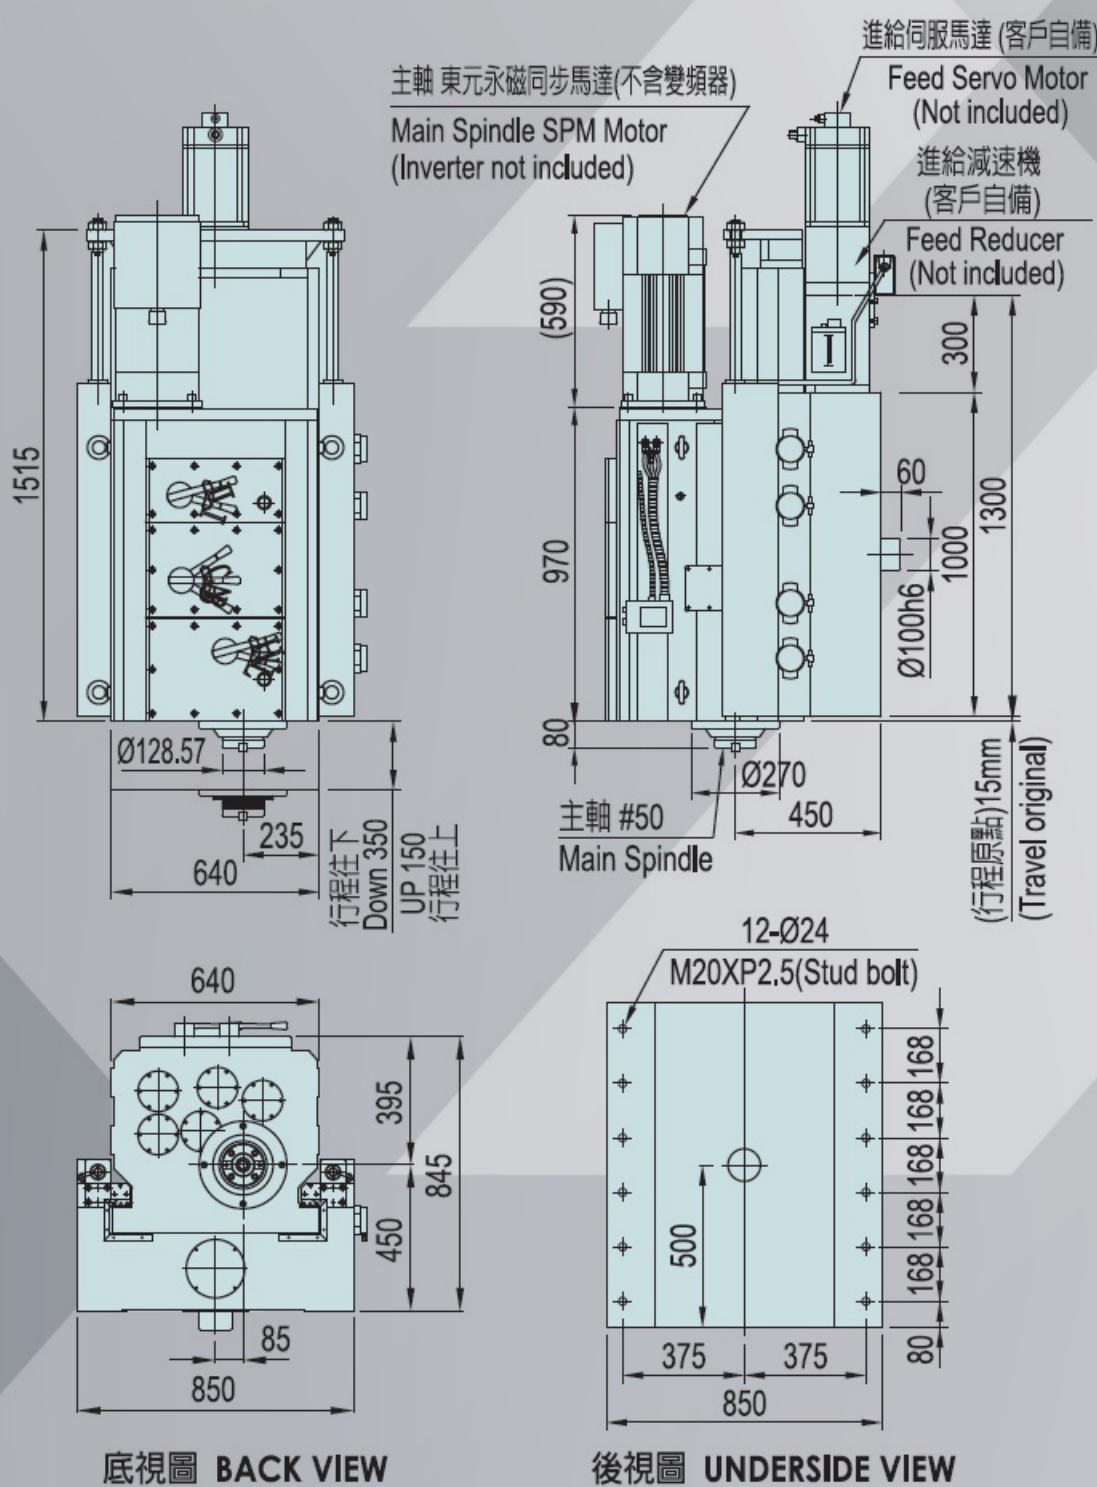

OH YOUNG MACHINERY CO., LTD.

台中市太平區41154工業十六路33號
No. 33, Gongye 16th Rd., Taiping Dist.,
Taichung City 41154, Taiwan

☎ 886-4-2271-5699 / 886-4-2271-5379

☎ 886-4-2271-5299

✉ ohyoung@ohyoung.com.tw

